

Extremely Low Pressure Drainage System


Characteristics

This extremely low pressure drainage system is based on the physical principle of air removal from the circuit and the consequent activation of extremely low aspiration. This function is achieved using a bulb pump with a non-return valve which is applied on the high efficiency anti-bacteria filter and allows removal of air from the circuit with a few rapid actions. Following this function, the bulb pump may be removed and the filter sealed with the included Luer plug. The maximum pressure that the bulb exercises is 140 mmHg, with the average working pressure of 70mmHg. The 500ml. drainage bag with non-return valve was designed to reduce the risk of occlusion at the tube entrance

Included are 3 connectors of different sizes
Sterilised by gamma rays
Latex Free device
Single packaged in double sterile packaging

Specifications

500 ml. bag: made of PVC
Bulb and connector: made of PVC
Y-connector: made of SMMA
Hydrophobic filter: made of PVC
Connectors: PVC/Styrolux

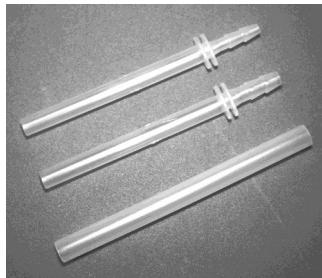


Codes

Extremely low pressure drainage system
REF DBP-001*
Box of 10 pcs. sterile

* Product not in stock; available by specific request

PATENTED

PVC bulb with non-return valve.
Permits quick removal of air present in the circuit and fast activation of extremely low negative pressure

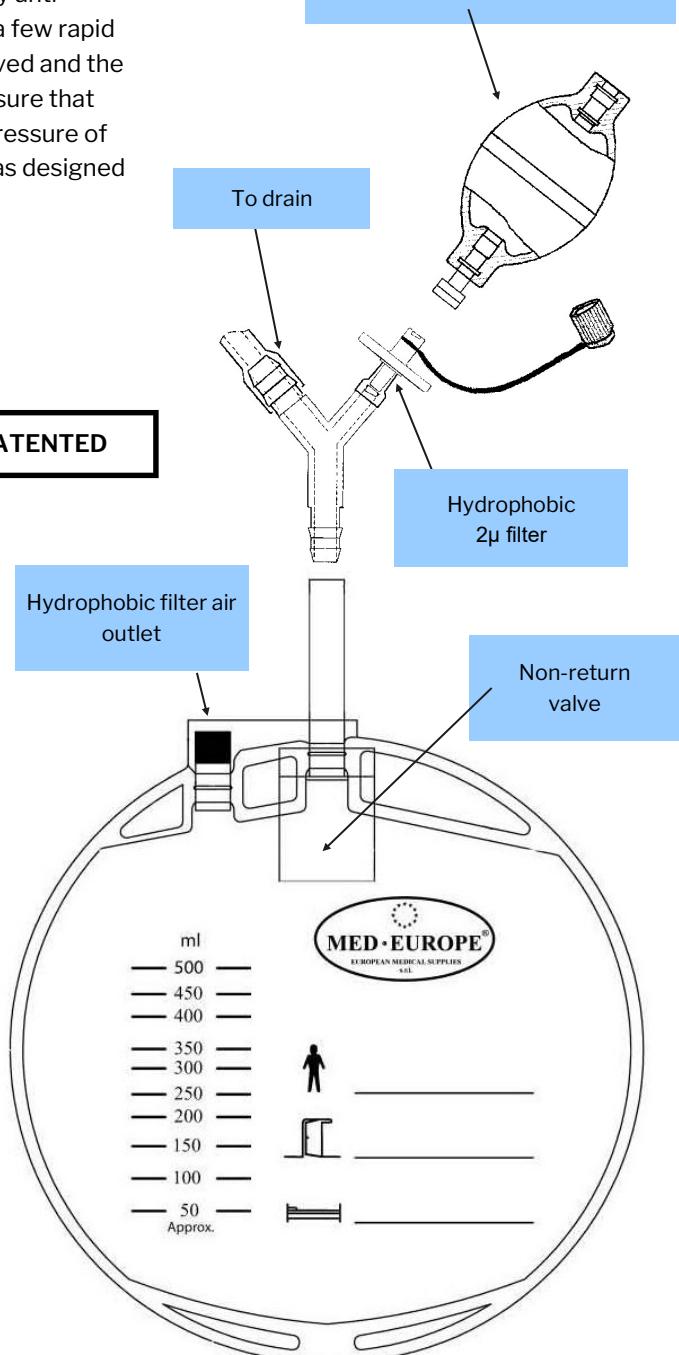

0425

STERILE R

CLASS I

RULE 1



Manufactured by:



Via Gramsci, 9 - 40018 San Pietro in Casale (BO) - Italy

Tel. +39 051.817902 +39 051.817850

www.simitalia.it www.medeurope.eu

E-Mail: info@medeurope.eu

Distributed by:

